

Air foot switch



Assembly Instructions 11.08



\$325.55

Part# FS-001

Complete assembly
with hoses

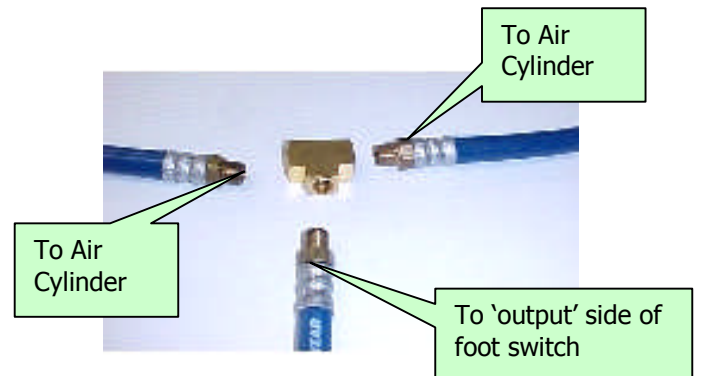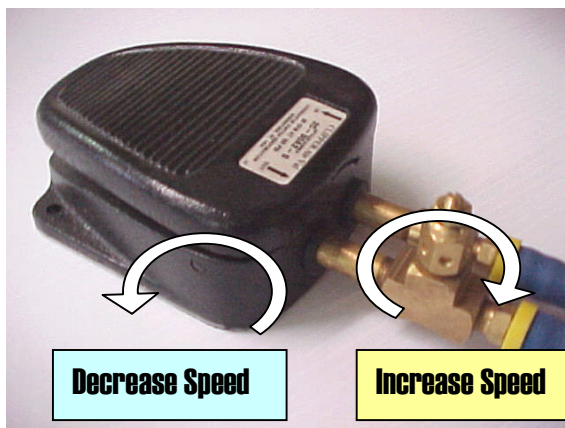

1. Re-install 2 air cylinders onto threaded holes on side of fixture
2. Attach 2 air cylinder hoses to brass T splitter and to foot switch 'output' hose
3. Install air supply to foot switch with suitable Quick Connect fitting
4. Adjust dwell/closing speed of unit for belting requirements by turning control screw

DISTRIBUTED BY: